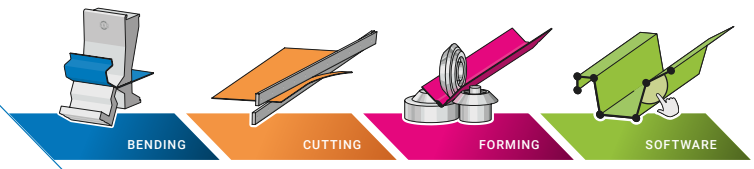

RAS

PRODUCTION PROGRAM

INNOVATION

MADE IN GERMANY

RAS 11.15
RAS 11.35

SWAGING MACHINES

Swaging wheels

2 speed ranges for high productivity and sensitive forming

The compact and versatile RAS swaging machines are ideal for the workshop as well as the construction site. They are ready for all applications with the 9 sets of standard wheels. On the RAS 11.35, the speed can be steplessly adjusted using a potentiometer on the machine stand. Experienced operators choose higher speeds, less trained people prefer the slower speed range. With the foot switch, the set speed can be recalled and the rotation of the rolls can be changed for Left-Right-Run.

Dimensions (max)

SWAGING MACHINES

RAS 11.15 (manual)

Sheet thickness max.
1.25 mm
Wheel center distance
50 mm
Working depth max.
200 mm

RAS 11.35 (motor driven)

Sheet thickness max.
1.25 mm
Wheel center distance
50 mm
Working depth max.
200 mm

BENDING CUTTING FORMING SOFTWARE

RAS Reinhardt Maschinenbau GmbH
Richard-Wagner-Straße 4–10
71065 Sindelfingen | Germany
Fon +49 7031-863-0
E-Mail: info@ras-online.de
www.ras-online.de

Edition number 08/26